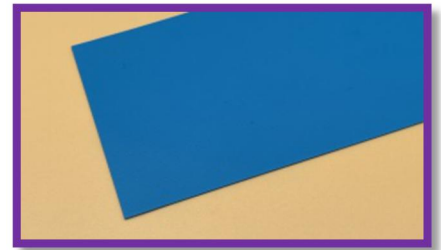
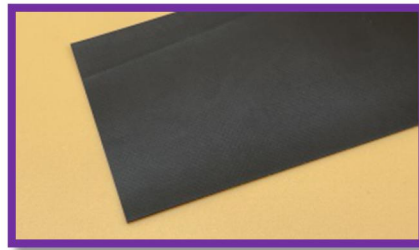
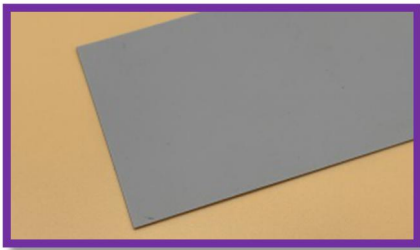


PVC TARPAULIN FOR BOAT 1000D*1000D 30*30 1500GSM**Features**

- Excellent tensile strength, tear resistance, extremely soft hand feeling
- Waterproof, flame retardant, Anti-UV, Anti-Bacterial, Anti-Mildew, Oil resistant
- Durable, wipe clean and easy to store away
- heavy duty and durable materials All colors are available

Product Overview**Technical Data Sheet**

Item Code		PTBFWM1500	Test Method
Base Fabric		1000D*1000D 30*30	DIN EN ISO2060
Weight (GSM)		1500	DIN EN ISO2286-2
Tensile Strength	Warp (N/5cm)	4300	DIN53354
	Weft (N/5cm)	4300	DIN53354
Tear Strength	Warp (N/5cm)	550	DIN53363
	Weft (N/5cm)	550	DIN53363
Peeling Strength	Warp (N/5cm)	180	DIN53357
	Weft (N/5cm)	180	DIN53357
Temperature		-30°C/+70°C	
Flame Retardant		B1/M1/M2/NFPA701	
Lacquering (Optional)		Acrylic/ PVDF	
Special Treatment		Anti-Wicking/Anti-UV/Anti-Aging/Cold Resistant/Osmosis Prevention/Mildew Resistant	

Information contained in this document is based on our general experience and is given in good faith. But we are unable to accept responsibility in respect to factors which are outside our knowledge or control.



Add: Room 912, No.3 Building, Shangdong Business Center, Haizhou District,
Haining, Zhejiang, China
Tel: +86-573-80776996 Fax: +86-573-80776998
Mob/Skype/Wechat: +86-15858322153
mailto:hncomax@163.com jeff@hncomax.com

